



Visit us online:
www.pumpsupplies.co.uk

Flygt BS2075

Electric Submersible Pump

- Dewatering pump designed for multiple applications operating in the toughest environments
- Cast Iron construction
- MT, HT or SH impellers available
- Complete with screened cable



T: 01452 726999
F: 01452 721746
E: sales@pumpsupplies.co.uk

www.pumpsupplies.co.uk



Require any pipework, accessories or pump control equipment? Please contact us for more information

BS 2075:



Product:	BS 2075.324
Installation:	S
Discharge:	2", 3" or 4"
Weight (Max):	90 kg (SH)
kW:	3.7 kW - 5.5 kW
Voltage/Phase:	400/3
Rated Current (A)	7.1 (MT & HT) 11 (SH)
Height (Av):	575 mm
Width (Av):	445 mm


Available in:

- MT (Medium flow & head)
- HT (High head)
- SH (Super high head)

Options:

- Available with POLY-Life wear parts
- Available in special voltages
- Zinc Anodes (seawater)

Part	Material
Outer Casing:	Cast Iron
Impeller:	Spring Steel
Stator Housing:	Cast Iron
Volute/Strainer:	Stainless Steel
Shaft:	Stainless Steel

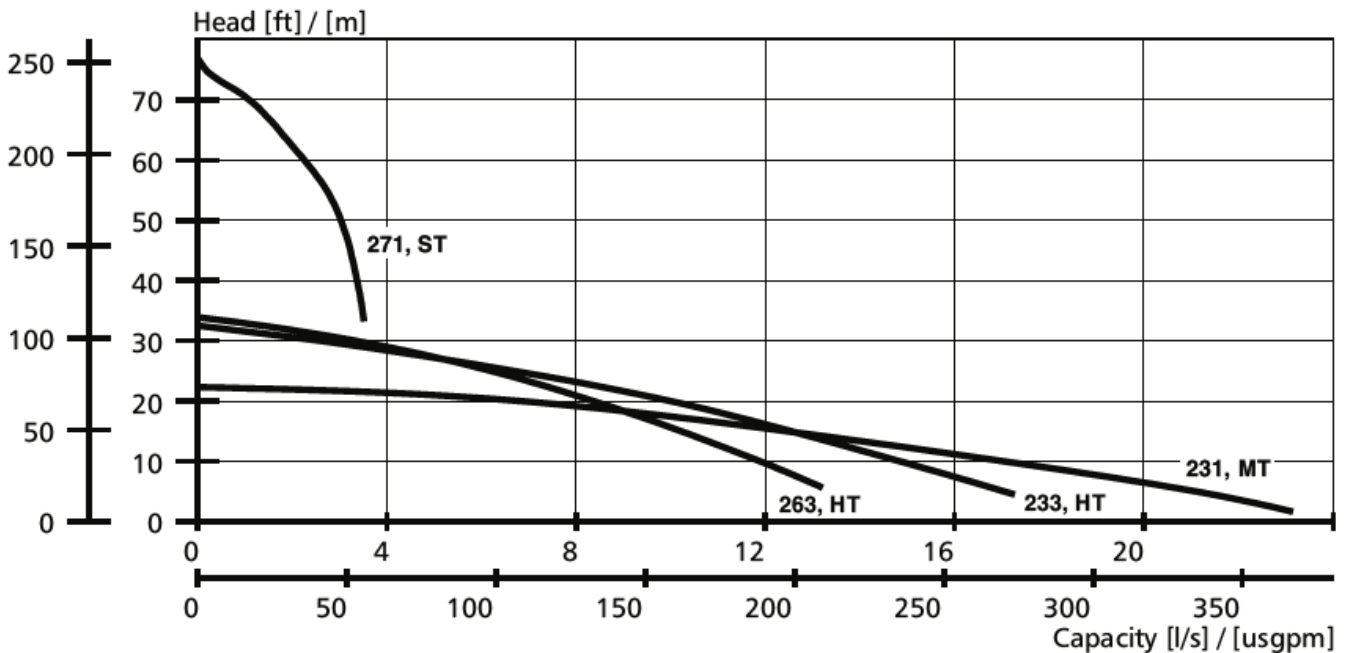

APPLICATIONS

Mining | Quarrying | Construction | Seawater | Final Effluent
Tunnelling | Industry | Flood relief | Storm Water | Dockyards