




Visit us online:
www.pumpsupplies.co.uk

Or via email:
sales@pumpsupplies.co.uk

Flygt C3085 MT/HT

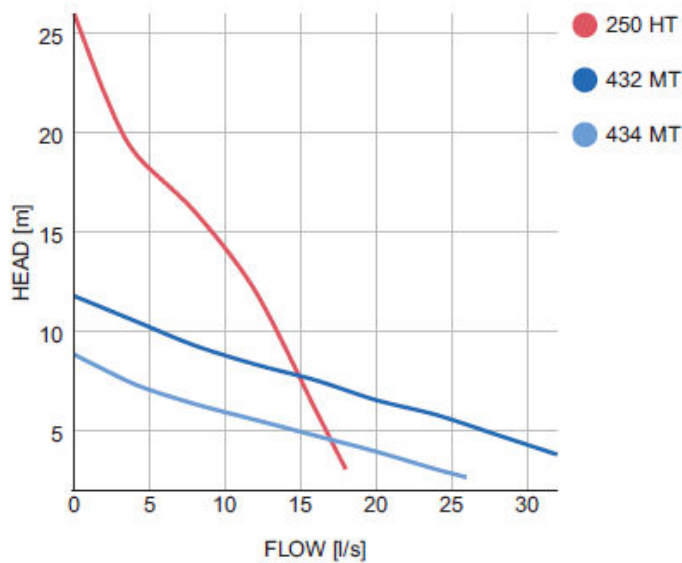

Impeller Curve	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
434	400	1.3	3.2	76	71	610	445
432	400	2.0	4.6	76	71	520	365
250	400	2.4	4.7	76	71	520	365

**Technical data is for guidance only; please contact your local depot for precise information*

Installation Types:

- P- Semi permanent, wet well
- S- Semi permanent, free standing
- T- Vertical, dry well

Impeller Type:

- C- single or multi-vane channel impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Flood/Storm Water
- Industrial Effluent
- Process Water

AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories , control equipment or require installation?

Please contact us for more information and we'll be happy to help

sales@pumpsupplies.co.uk

01452 726999

www.pumpsupplies.co.uk