


Visit us online: www.pumpsupplies.co.uk

Or via email: sales@pumpsupplies.co.uk

Flygt C3102 MT/HT

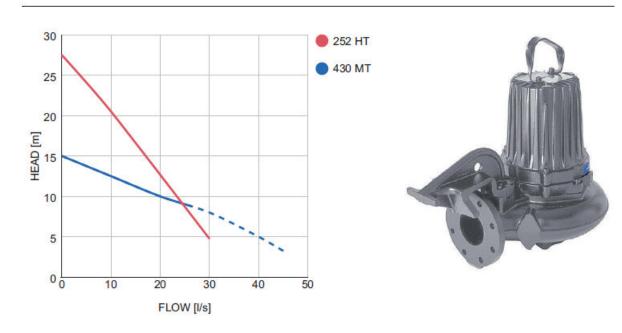

Impeller	Voltage	Motor	F.L.C.	Discharge	Weight	Height (mm)	Width
Curve	(v)	(kw)	(amps)	(mm)	(kg)		(mm)
430	400	3.1	6.4	100	121	705	610
252	400	4.4	8.6	76	114	695	605

^{*}Technical data is for guidance only; please contact your local depot for precise information

Installation Types:

- P- Semi permanent, wet well
- S- Semi permanent, free standing
- T- Vertical, dry well

Impeller Type:

C- single or multi-vane channel impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Flood/Storm Water
- Industrial Effluent
- Process Water

AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories, control equipment or require installation?

Please contact us for more information and we'll be happy to help