



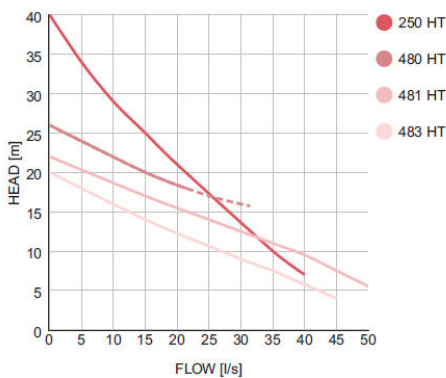

Visit us online:
www.pumpsupplies.co.uk

Or via email:
sales@pumpsupplies.co.uk

Flygt C3127 LT/MT/HT/SH

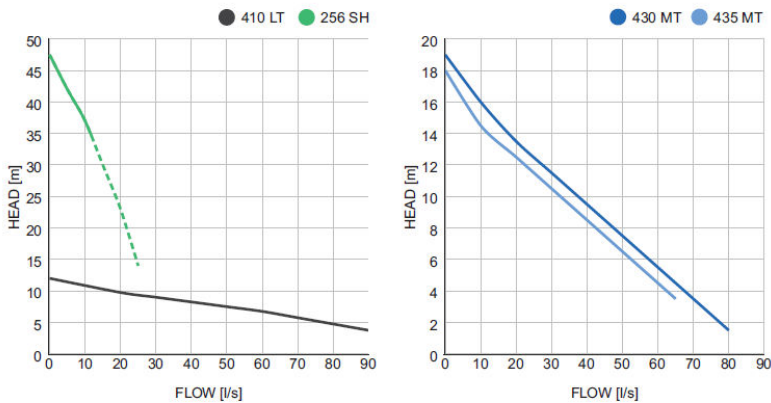

Installation Types:

- P- Semi permanent, wet well
- S- Semi permanent, free standing
- T- Vertical, dry well

Impeller Type:

C- single or multi-vane channel impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Flood/Storm Water
- Industrial Effluent
- Process Water

Impeller Curve	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
410	400	5.9	12	150	188	780	795
435	400	5.9	12	150/100	165	765	705
430	400	5.9	12	150/100	165	765	705
483	400	5.9	12	100	155	735	635
481	400	5.9	12	100	155	735	635
480	400	5.9	12	100	155	735	635
250	400	7.4	14	76	155	735	635
256	400	7.4	14	76	160	735	635

**Technical data is for guidance only; please contact your local depot for precise information*

AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories , control equipment or require installation?

Please contact us for more information and we'll be happy to help

sales@pumpsupplies.co.uk

01452 726999

www.pumpsupplies.co.uk