



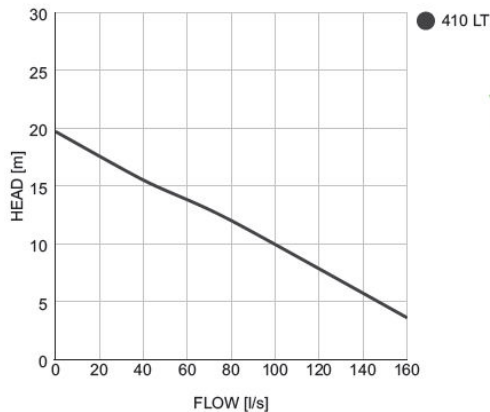

Visit us online:
www.pumpsupplies.co.uk

Or via email:
sales@pumpsupplies.co.uk

Flygt N3153 LT/MT/HT/SH

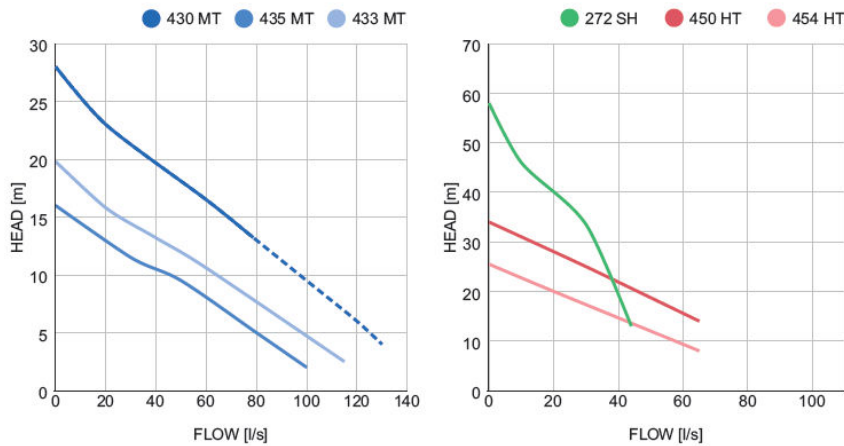

Installation Types:

- P- Semi permanent, wet well
- S- Free standing
- T- Vertical, dry well

Impeller Type:

- N- self cleaning impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Flood/Storm Water
- Industrial Effluent
- Process Water

Impeller Curve	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
435	400	7.5	16	150	252	1068	834
433	400	9	19	150	252	1068	834
454	400	9	19	100	232	1050	664
410	400	13.5	28	200	379	1102	955
430-433	400	13.5	28	150	252	1068	834
450-454	400	13.5	28	100	232	1050	664
272-275	400	15	27	80	242	1052	652



**Technical data is for guidance only; please contact your local depot for precise information*

AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories , control equipment or require installation?

Please contact us for more information and we'll be happy to help

sales@pumpsupplies.co.uk

01452 726999

www.pumpsupplies.co.uk