

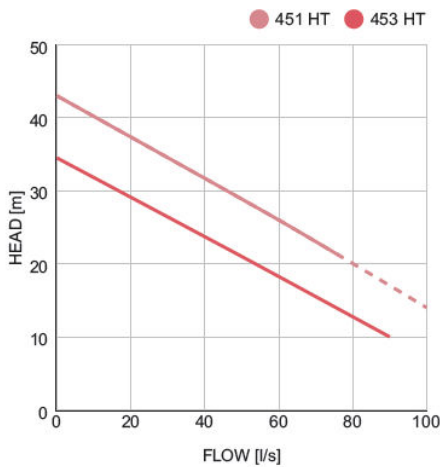


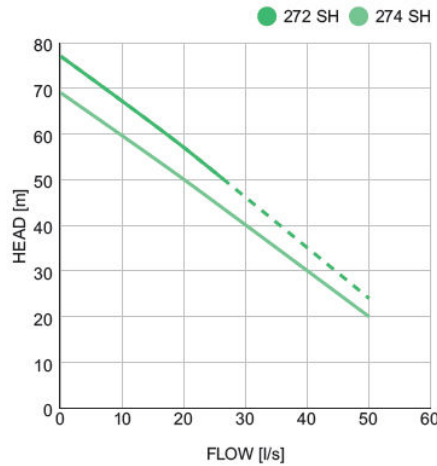

Visit us online:
www.pumpsupplies.co.uk

Or via email:
sales@pumpsupplies.co.uk

Flygt N3171 MT/HT/SH

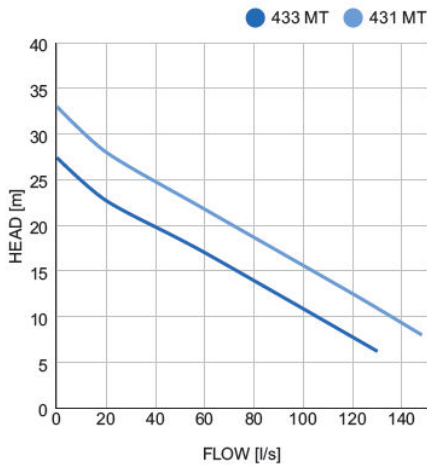

Installation Types:

- P- Semi permanent, wet well
- S- Free standing
- T- Vertical, dry well

Impeller Type:

- N- self cleaning impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Flood/Storm Water
- Industrial Effluent
- Process Water

Impeller Curve	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
433	400	18.5	36	150	362	1225	884
431	400	22	41	150	362	1225	884
451-453	400	18.5	41	100	321	1174	729
451-453	400	22	41	100	321	1174	729
272-274	400	22	38	100	366	1179	750



**Technical data is for guidance only; please contact your local depot for precise information*

AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories , control equipment or require installation?

Please contact us for more information and we'll be happy to help

sales@pumpsupplies.co.uk

01452 726999

www.pumpsupplies.co.uk