




Visit us online:
www.pumpsupplies.co.uk

Or via email:
sales@pumpsupplies.co.uk

Flygt N3356

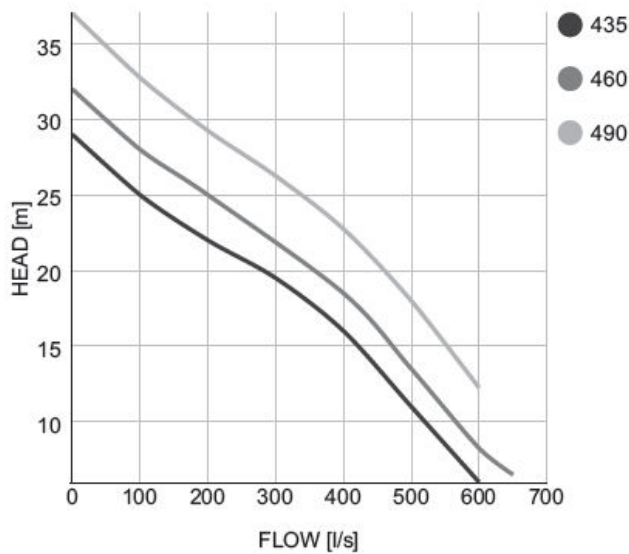

Impeller	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
435	400	75	150	350	1520	1815	1430
460	400	90	185	350	1750	1800	1430
490	400	140	268	350	1900	1940	1430

**Technical data is for guidance only; please contact your local depot for precise information*

Installation Types:

- P- Semi permanent, wet well
- S- Semi permanent, free standing
- T- Vertical, dry well

Impeller Type:

- N- self cleaning impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Flood/Storm Water
- Industrial Effluent
- Process Water



AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories , control equipment or require installation?

Please contact us for more information and we'll be happy to help

sales@pumpsupplies.co.uk

01452 726999

www.pumpsupplies.co.uk