



Tsurumi HS Range

Electric Submersible Pump

- Portable, lightweight robust dewatering pump
- Used on a wide variety of applications
- Cast Aluminium outer casing
- Semi-vortex impeller



T: 01452 726999

F: 01452 721746

E: sales@pumpsupplies.co.uk


www.pumpsupplies.co.uk



Require any pipework, accessories or pump control equipment? Please contact us for more information

Product:	Tsurumi HS Range
Installation:	S
Discharge:	2" & 3"
Weight (Max):	19.6 kg
kW:	0.4 kW - 0.75 kW
Voltage/Phase:	230/1
Rated Current (A)	5.5
Max Height:	424 mm
Max Width:	285 mm

MATERIALS	
Outer Casing:	Ductile Iron casting
Impeller:	Urethane Rubber

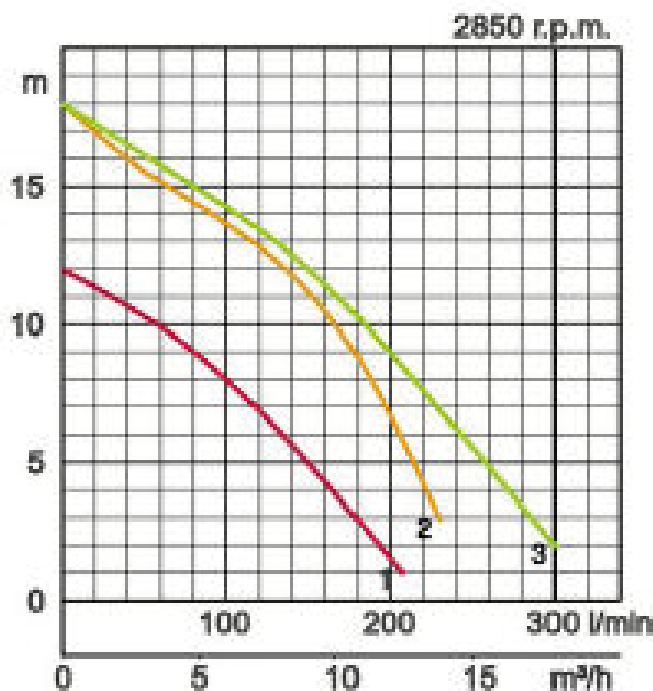

1. HS2.4S 2. HS2.75S 3. HS3.75S

Applications:

- Mining
- Quarrying
- Construction
- Tunnelling
- Industry

Options:

- Available in manual or auto (with floats)

APPLICATIONS

Mining | Quarrying | Construction | Nuisance Water
Tunnelling | Industry | Light flood relief | Water features