



Tsurumi LSC Range

Electric Submersible Pump

- Portable, lightweight single phase robust dewatering pump
- Used on a wide variety of applications
- Cast Aluminium outer casing
- Semi-vortex impeller



T: 01452 726999

F: 01452 721746

E: sales@pumpsupplies.co.uk


www.pumpsupplies.co.uk



Require any pipework, accessories or pump control Equipment? Please contact us for more information

Product:	LSC 1.4 S
Installation:	S
Discharge:	25 mm
Weight (Max):	11 kg
kW:	0.48 kW
Voltage/Phase:	230/1
Rated Current (A)	6.2
Max Height:	316 mm
Max Width:	196 mm

MATERIALS	
Outer Casing:	Ethylene Propylene Rubber
Impeller:	Urethane Rubber

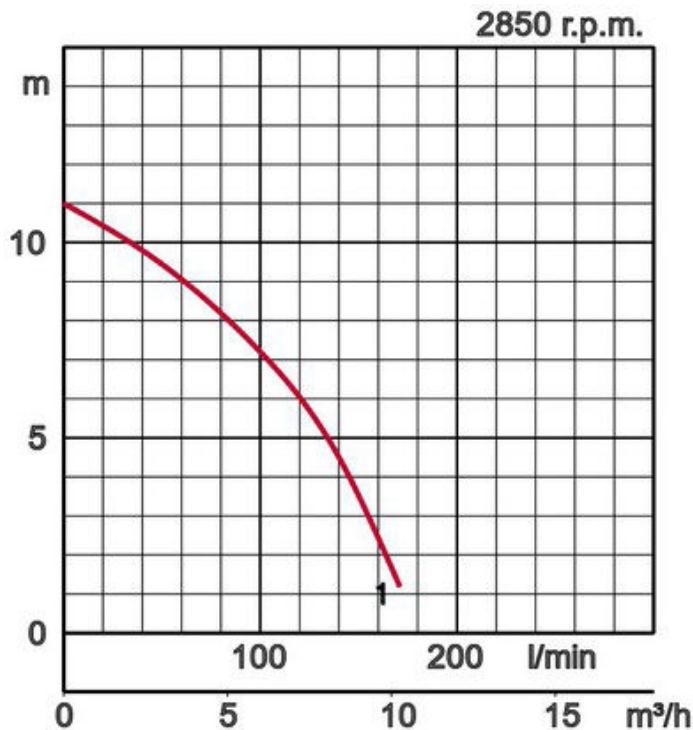

Options:

Available in manual or auto (with float)

APPLICATIONS

Mining | Quarrying | Construction | Tunnelling | Industry | Nuisance Water