


Visit us online:

www.pumpsupplies.co.uk

Or via email:

sales@pumpsupplies.co.uk

Flygt B2102 MT/HT

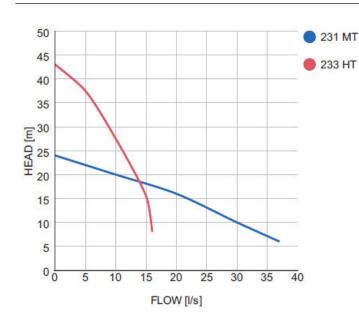



Impeller	Voltage	Motor	F.L.C.	Discharge	Weight (kg)	Height	Width
Curve	(v)	(kw)	(amps)	(mm)		(mm)	(mm)
231	400	5.2	10	100	50	625	465
233	400	5.2	10	76	50	625	465

^{*}Technical data is for guidance only; please contact your local depot for precise information

Typical Applications:

- Construction
- Mining & Quarrying
- Dockyards
- Seawater
- Tunnelling
- Flood Alleviation
- Industry

Installation Types available:

S- Semi permanent, free standing

Impeller Type:

B; Hard-Iron impeller

Options:

Zinc Anodes

AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories, control equipment or require installation?

Please contact us for more information and we'll be happy to help