



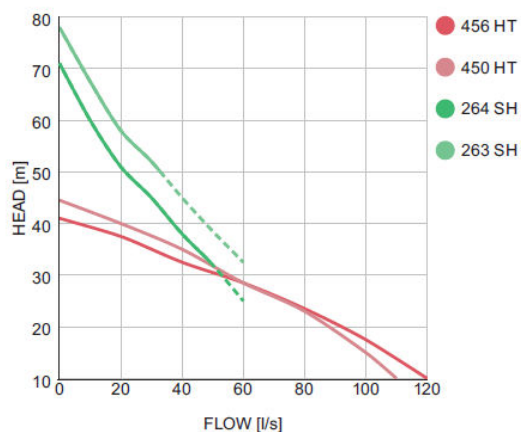

Visit us online:
www.pumpsupplies.co.uk

Or via email:
sales@pumpsupplies.co.uk

Flygt C3201 LT/MT/HT/SH

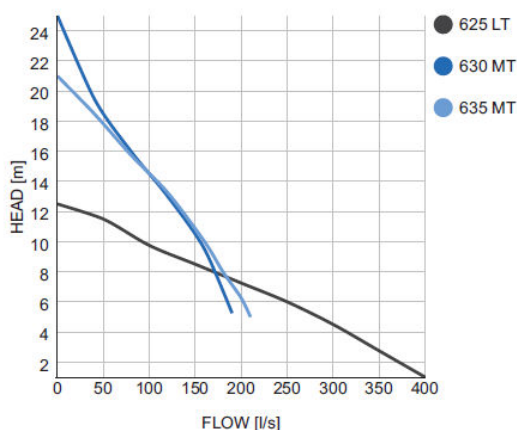

Installation Types:

- P- Semi permanent, wet well
- S- Semi permanent, free standing
- T- Vertical, dry well

Impeller Type:

- C- single or multi-vane channel impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Flood/Storm Water
- Industrial Effluent
- Process Water

Impeller Curve	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
625	400	22	45	300	640	1600	1420
630	400	22	45	200	588	1445	1125
635	400	22	45	200	588	1445	1125
456	400	30	56	150	540	1455	920
450	400	30	56	150	540	1455	920
264	400	30	52	100	560	1470	885
263	400	30	52	100	560	1470	885



**Technical data is for guidance only; please contact your local depot for precise information*

AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories , control equipment or require installation?

Please contact us for more information and we'll be happy to help

sales@pumpsupplies.co.uk

01452 726999

www.pumpsupplies.co.uk