




Visit us online:
www.pumpsupplies.co.uk

Or via email:
enquiries@pumpsupplies.co.uk

Flygt C3127 HT

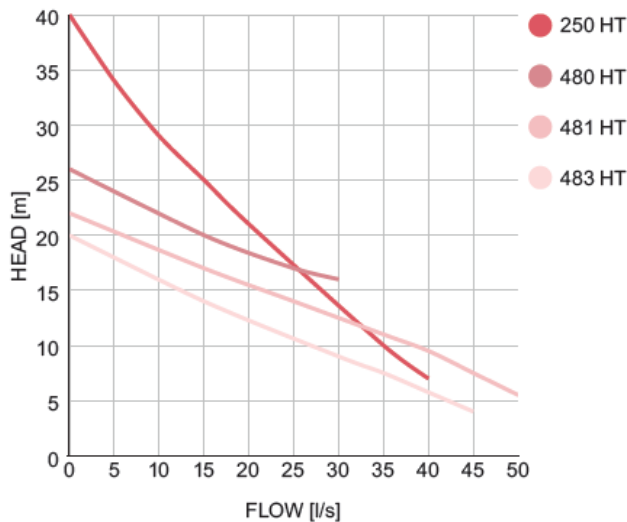

Impeller Curve	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
483	400	5.9	12	100	155	735	635
481	400	5.9	12	100	155	735	635
480	400	5.9	12	100	155	735	635
250	400	7.4	14	76	155	735	635

**Technical data is for guidance only; please contact your local depot for precise information*

Installation Types available:

- P- Semi permanent, wet well
- S- Semi permanent, free standing
- T- Vertical, dry well
- Z- Horizontal, dry well

Impeller Type:

- C- single or multi-vane channel impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Storm Water
- Industrial Effluent
- Process Water

Available to Hire or Purchase

Hire Pumps held in stock for immediate delivery