




Visit us online:
www.pumpsupplies.co.uk

Or via email:
enquiries@pumpsupplies.co.uk

Flygt C3127 LT/SH

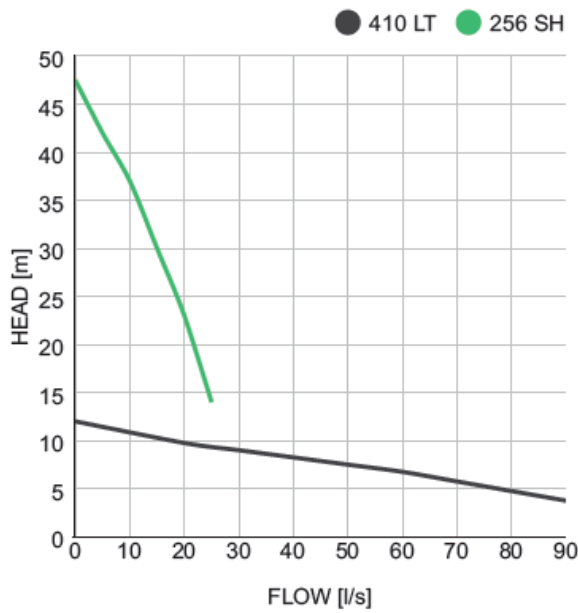

Impeller Curve	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
410	400	5.9	12	150	188	780	795
256	400	7.4	14	76	160	735	635

**Technical data is for guidance only; please contact your local depot for precise information*

Installation Types available:

- P- Semi permanent, wet well
- S- Semi permanent, free standing
- T- Vertical, dry well
- Z- Horizontal, dry well

Impeller Type:

- C- single or multi-vane channel impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Storm Water
- Industrial Effluent
- Process Water

Available to Hire or Purchase

Hire Pumps held in stock for immediate delivery