




Visit us online:
www.pumpsupplies.co.uk

Or via email:
enquiries@pumpsupplies.co.uk

Flygt C3127 MT

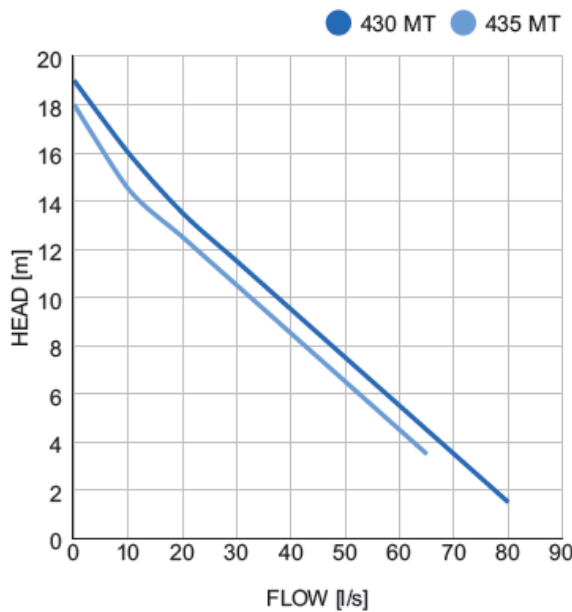

Impeller Curve	Voltage (v)	Motor (kw)	F.L.C. (amps)	Discharge (mm)	Weight (kg)	Height (mm)	Width (mm)
435	400	5.9	12	150/100	165	765	705
430	400	5.9	12	150/100	165	765	705

**Technical data is for guidance only; please contact your local depot for precise information*

Installation Types available:

- P- Semi permanent, wet well
- S- Semi permanent, free standing
- T- Vertical, dry well
- Z- Horizontal, dry well

Impeller Type:

- C- single or multi-vane channel impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Storm Water
- Industrial Effluent
- Process Water

Available to Hire or Purchase
 Hire Pumps held in stock for immediate delivery