


Visit us online: www.pumpsupplies.co.uk

Or via email: sales@pumpsupplies.co.uk

Flygt N3102 MT/SH

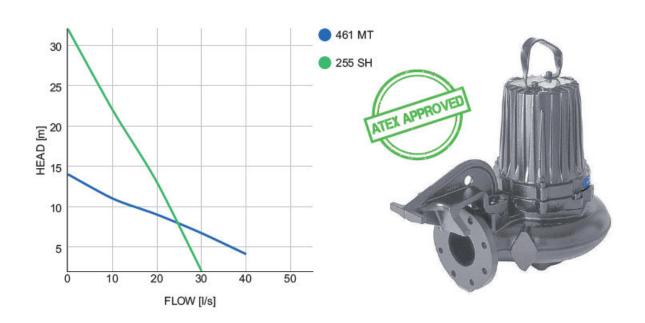

	Voltage	Motor	F.L.C.	Discharge	Weight	Height	Width
	(v)	(kw)	(amps)	(mm)	(kg)	(mm)	(mm)
460/461	400	3.1	6.6	100	116	705	610
255	400	4.2	8.3	80	96	695	605

^{*}Technical data is for guidance only; please contact your local depot for precise information

Installation Types:

- P- Semi permanent, wet well
- S- Semi permanent, free standing
- T- Vertical, dry well

Impeller Type:

N- self cleaning impeller

Typical Applications:

- Wastewater
- Cooling Water
- Raw Water
- Sludge
- Flood/Storm Water
- Industrial Effluent
- Process Water



AVAILABLE FOR IMMEDIATE HIRE

Need any pipework & accessories, control equipment or require installation?

Please contact us for more information and we'll be happy to help